




ANIMAL-CENTRIC LIGHTING SYSTEMS

IUL fixture base

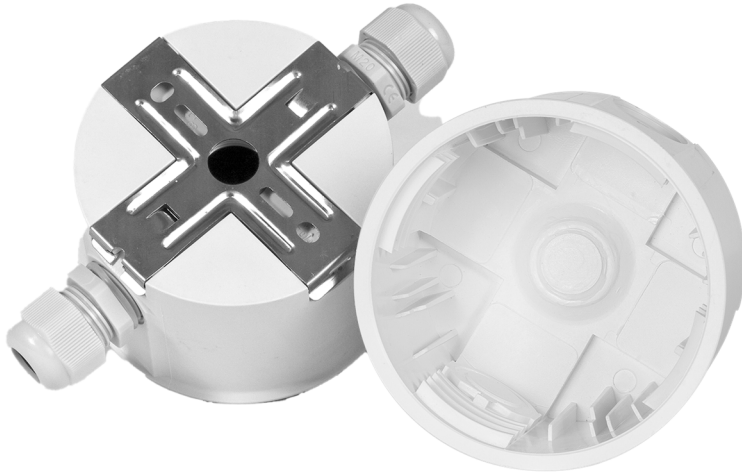

- *Easy installation*
- *Various mounting options including, ceiling, wall, pendant, steel suspension and wire*
- *Water tight IP66 construction*

Invest in the quality of your lighting system

The IUL fixture base is an ideal covering for IXOS lamps. Designed to withstand harsh barn environments with its IP66-grade protection rating, it can easily be fixed to a ceiling, wall, pendant or steel suspension wire.

Visit our website for more information: www.once.lighting

Specifications and Ordering

IUL Fixture Base Specifications

Warranty period	3 years
HS-Code	731029990
Country of origin	People's Republic of China

Ordering Information

IUL Fixture Base	929002100292
------------------	--------------

Operating and Mechanical Specifications

Operating temperature	-10°C to 40°C / 14°F to 104°F
Connection	3 pole fast fixing terminal M20 cable glands
Diameter	95mm
Height	60mm
Length	-
Width	-
Mount	Surface mount
Housing material	Heat resistant plastic
Color	Gray

Safety and Certifications

CE mark	Yes
RoHS compliant	Yes
ANSI/UL STD 1598 and 8800	-
Can/CSA STD C22.2 NO 250.0	-
UL50E	-
ESČ	-
ENEC	-
CB	-
SASO (Saudi Arabia)	-
NOM (Mexico)	-
CCC (China)	-
ANATEL (Brazil)	-
Local Certifications	-
Flammability mark	-
IK impact rating	-
IP code	IP66/D

© 2020 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Revised 06 /2020 Data subject to change